


MINERAL INSULATED

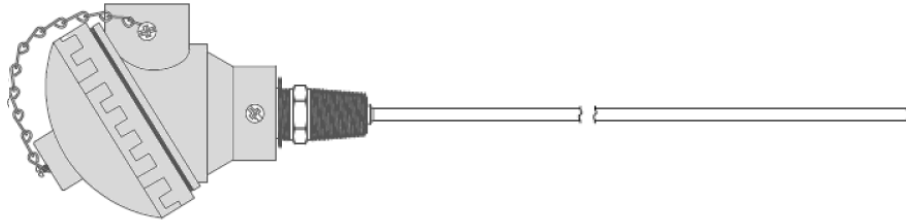

MII

1	2	3	4	5	6	7	8	9
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

CALIBRATION		1
J, K, T, E		

DIAMETER		2
.125	1/8"	
.188	3/16"	
.250	1/4"	

SHEATH MATERIAL		3
S	316 SS	
I	INCONEL 600	

JUNCTION		4
G	GROUNDED	
U	UNGROUNDED	

SHEATH LENGTH		5
	EX: 6 1/2"	

TRANSMITTER		2
T	Tx BLOCK	
I	Tx ISOBLOCK	
0	NO TRANSMITTER	

7	TERMINATION	
	KNE	STAN. ALUMNINUM
	KSE	SMALL ALUMINUM
	KNPL	STAN. ALUM. FLIP TOP
	CSS	STAN. STAINLESS HEAD
	CCI	STAN. CAST IRON HEAD
	KPP	STAN.POLYPROP. HEAD
	KNN	STAN. NYLON HEAD
	XPA	EXPLOSION PROOF ALUM.
	XDS	EXPLOSION PROOF 316 SS

8	FITTINGS	
	75	3/4" NPT
	50	1/2" NPT
	25	1/4" NPT

9	OTHER	
	X	SPECIFY
	0	NONE

