


TEMTRONICS CORP

FIXED BAYONET

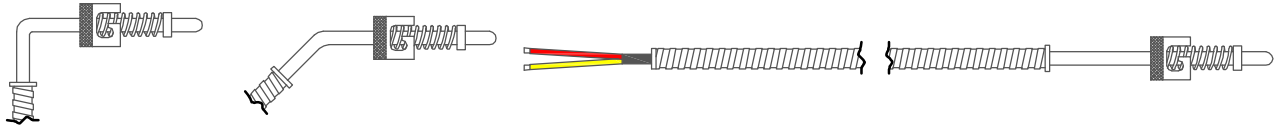

BAYF

1	2	3	4	5	6	7	8	9
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

CALIBRATION	
J	(+) Iron Vs. (-) Constantan
K	(+) Ni.-Chro. Vs. (-) Ni.-Alum.

1

STYLE	
S	STRAIGHT
F	45° BEND
N	90° BEND

2

DIAMETER	
2	.125 (1/8")
3	.188 (3/16")
4	.250 (1/4")

3

FIXED DIMENSION	
	2" STANDARD
X	SPECIFY

4

JUNCTION	
G	GROUNDED
U	UNGROUNDED

5

WIRE LENGTH	
6	EX: 36"

WIRE TYPE	
F	FIBERGLASS
S	FIBERGLASS W/ SSOB
F	FIBERGLASS w/ ARMOR
S	TEFLON

TERMINATION	
A	SPLIT LEADS
B	SPLIT LEADS W/ SPADES
C	STANDARD MALE CONN.
D	MINI MALE CONN.
E	STANDARD FEMALE CONN.
F	MINI FEMALE CONN.

OTHER	
X	SPECIFY
O	NONE

9

