


TEMTRONICS CORP

MINERAL INSULATED

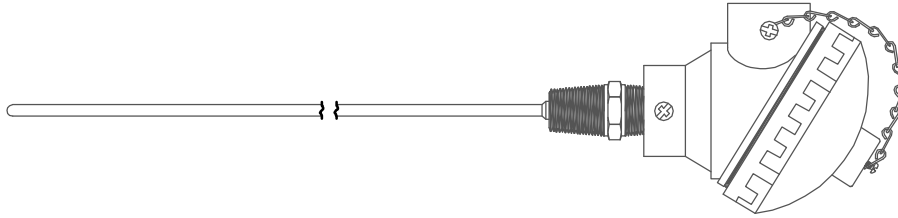

MII

1	2	3	4	5	6	7	8	9
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

CALIBRATION		1
J, JJ, K, KK, T, E		

DIAMETER		2
2	.125 (1/8")	
3	.188 (3/16")	
4	.250 (1/4")	

SHEATH MATERIAL		3
S	316 SS	
I	INCONEL 600	

JUNCTION		4
G	GROUNDED	
U	UNGROUND	

SHEATH LENGTH		5
	EX: 6 1/2"	

TRANSMITTER		2
T	Tx BLOCK	
I	Tx ISOBLOCK	
0	NO TRANSMITTER	

TERMINATION		7
KNE	STAN. ALUMNINUM	
KSE	SMALL ALUMINUM	
KNPL	STAN. ALUM. FLIP TOP	
CSS	STAN. STAINLESS HEAD	
CCI	STAN. CAST IRON HEAD	
KPP	STAN.POLYPROP. HEAD	
KNN	STAN. NYLON HEAD	
XPA	EXPLOSION PROOF ALUM.	
XDS	EXPLOSION PROOF 316 SS	

FITTINGS		8
2	1/2" NPT	
4	1/4" NPT	

OTHER		9
X	SPECIFY	
0	NONE	

