


# TEMTRONICS CORP

## INDUSTRIAL RTD

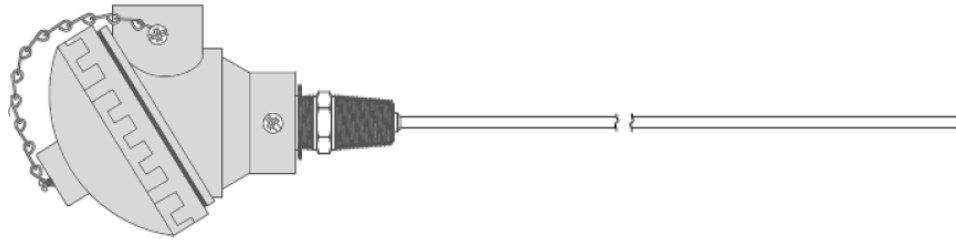

# RTDI

1	2	3	4	5	6	7	8
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

RTD ELEMENT	
<b>C</b>	100 OHM
<b>M</b>	1000 OHM

1

DIAMETER	
<b>2</b>	2 WIRES
<b>3</b>	3 WIRES

2

DIAMETER	
<b>.125</b>	1/8"
<b>.188</b>	3/16"
<b>.250</b>	1/4"
<b>.375</b>	3/8"

3

SHEATH LENGTH	
<b>EX:</b>	6 1/2"

4

TRANSMITTER	
<b>T</b>	Tx BLOCK
<b>0</b>	NO TRANSMITTER

5

6

TERMINATION	
<b>KNE</b>	STAN. ALUMNINUM
<b>KSE</b>	SMALL ALUMINUM
<b>KNPL</b>	STAN. ALUM. FLIP TOP
<b>CSS</b>	STAN. STAINLESS HEAD
<b>CCI</b>	STAN. CAST IRON HEAD
<b>KPP</b>	STAN.POLYPROP. HEAD
<b>KNN</b>	STAN. NYLON HEAD
<b>XPA</b>	EXPLOSION PROOF ALUM.
<b>XDS</b>	EXPLOSION PROOF 316 SS

7

FITTINGS	
<b>75</b>	3/4" NPT
<b>50</b>	1/2" NPT
<b>25</b>	1/4" NPT

8

OTHER	
<b>X</b>	SPECIFY
<b>0</b>	NONE

