


TEMTRONICS CORP

MAGNETIC RTD

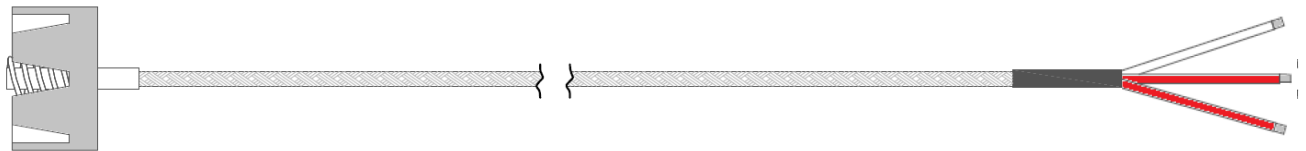

RTDM

1	2	3	4	5	6	7	8
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

RTD ELEMENT	
C	100 OHM
M	1000 OHM

 1

 6

WIRE TYPE	
F	FIBERGLASS
S	FIBERGLASS W/ SSOB
A	FIBERGLASS W/ ARMOR
T	TEFLON

NUMBER OF LEADS	
2	2 WIRES
3	3 WIRES

 2

 7

TERMINATION	
A	SPLIT LEADS
B	SPLIT LEADS W/ SPADES
C	STANDARD MALE
D	MINI MALE
E	STANDARD FEMALE
F	MINI FEMALE

DIAMETER	
2	.125 (1/8")
3	.188 (3/16")
4	.250 (1/4")

 3

SHEATH LENGTH	
	EX: 6 1/2"

 4

 8

OTHER	
X	SPECIFY
O	NONE

WIRE LENGTH	
	EX: 36"

 5
